



Adjustment of teleflex cable:

If the top speed of the machine is too low, or the centering of the handle for driving is not correct, the cable can be adjusted at the fixation point, like shown on the pictures below.

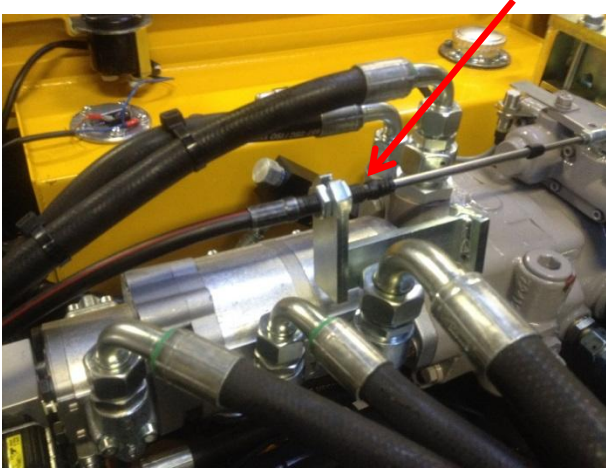

After the adjustment of the cable, it might be necessary to adjust the reverse alarm sensor.

Loosen the nut on the lever at the end of the cable then move the plate to activate the sensor. Check and readjust until correct function.

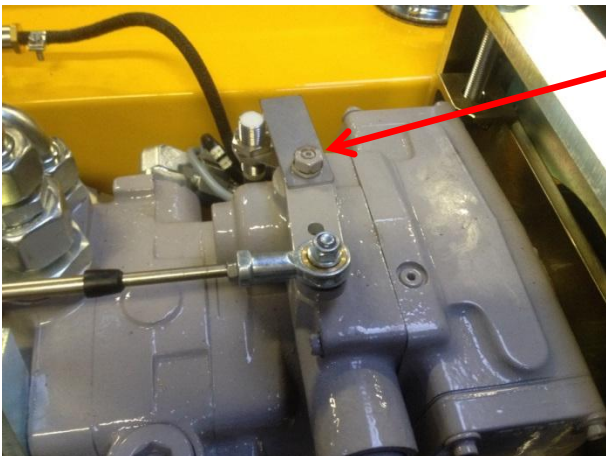

FAQ00010

The cable can also be adjusted simply by moving the handle. This adjustment is not very accurate but easier. Move it just one “click” at a time.

